






RS45 SERIES TECHNICAL GUIDE





> TRUCK DIMENSIONS

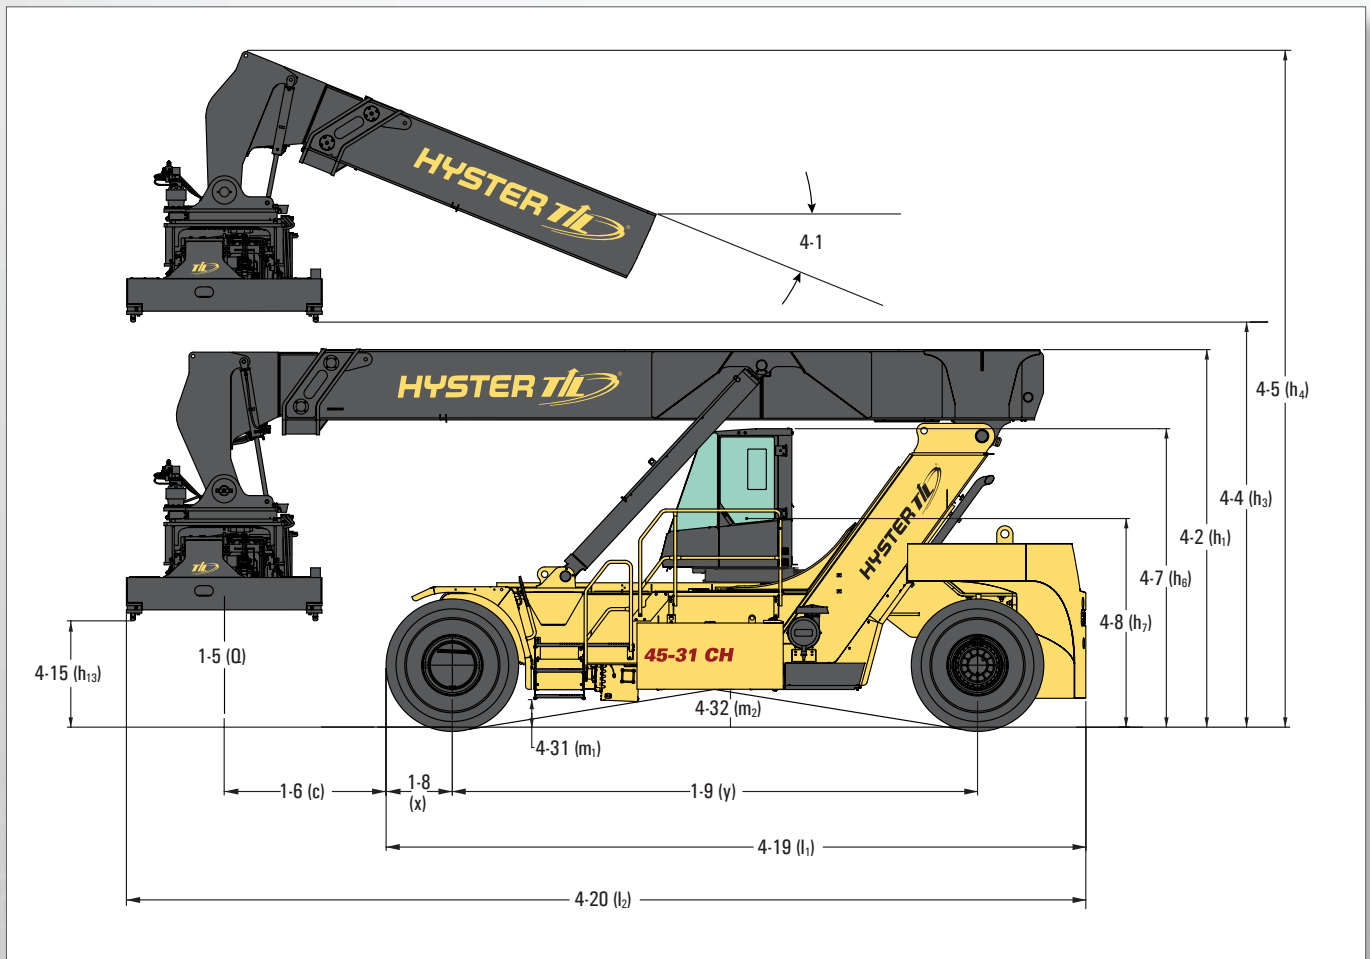

MAXIMUM CAPACITY CONTAINER PICKING END TO END		
MODEL	20'	40'
	kg	kg
RS45-27	31,000	12,300
RS45-31	34,000	15,000

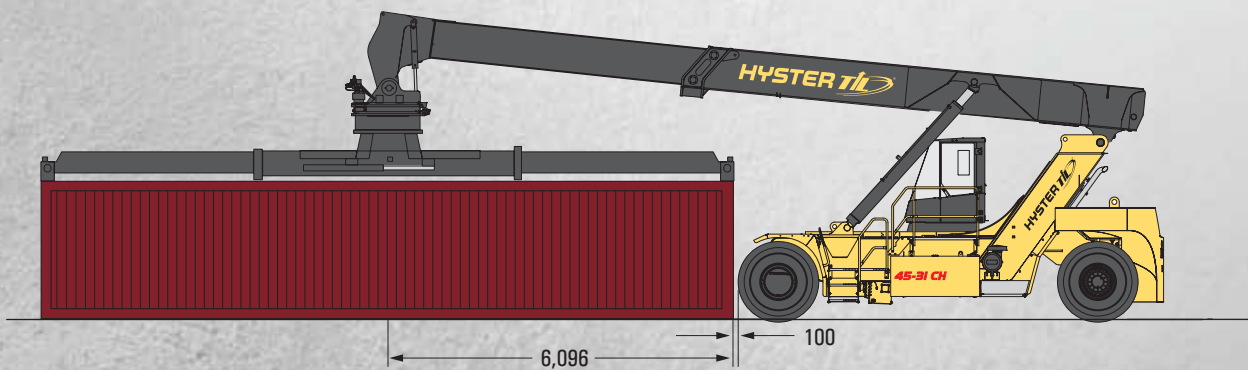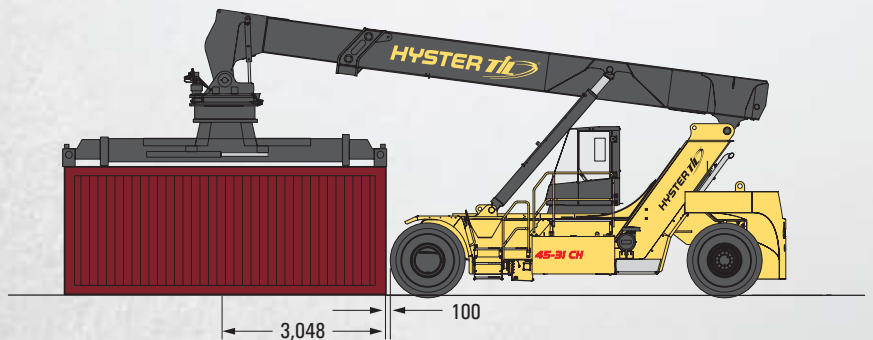

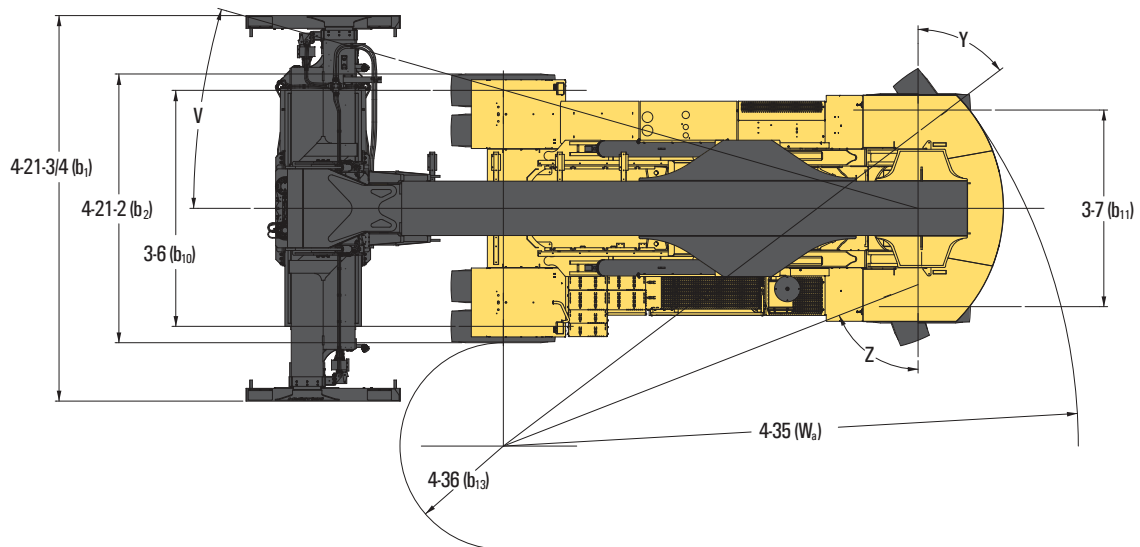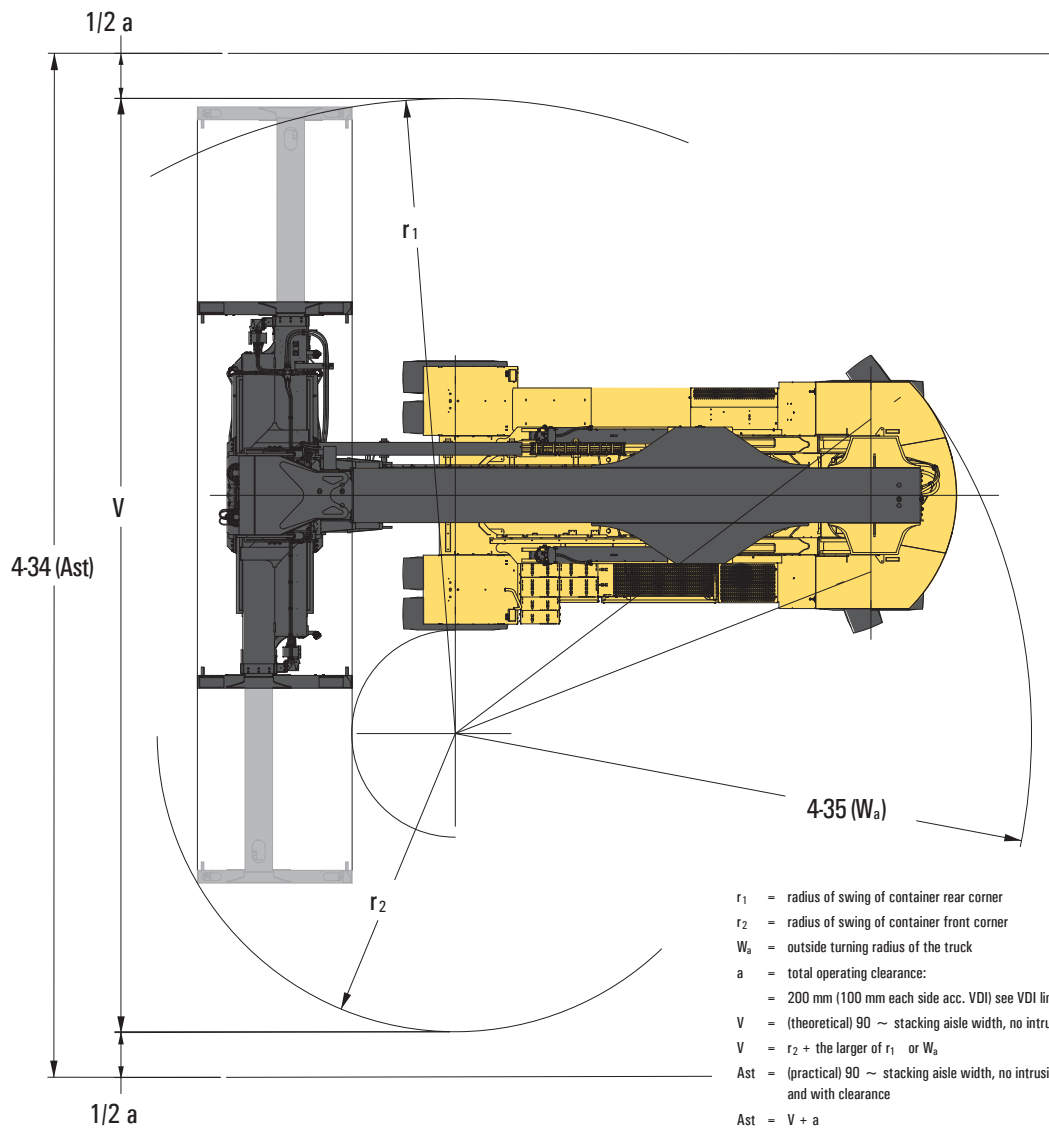

> RS 45-27, RS 45-31 CONTAINER HANDLERS

				RS 45-27CH		RS 45-31CH		
GENERAL	1-1	Manufacturer			HYSTER-TIL		HYSTER-TIL	
	1-2	Model designation			RS45-27CH		RS45-31CH	
	1-3	Powertrain / drivetrain			Diesel		Diesel	
	1-4	Operator type			Seated		Seated	
	1-5-1	Load capacity at load center distance c_1	Q_1	kg	45,000		45,000	
	1-5-2	Load capacity at load center distance c_2	Q_2	kg	27,000		31,000	
	1-5-3	Load capacity at load center distance c_3	Q_3	kg	12,300		15,000	
	1-6-1	Load center distance c_1 (1)	c_1	mm	1,565		1,565	
	1-6-2	Load center distance c_2 (1)	c_2	mm	3,815		3,815	
	1-6-3	Load center distance c_3 (1)	c_3	mm	6,315		6,315	
1-8	Load distance	x	mm	835		835		
1-9	Wheelbase	y	mm	6,500		6,500		
1-10	Stacking height at 1st row (number x container height)		#	5 x 9' 6"		5 x 9' 6"		
WEIGHT	2-1	Service weight		kg	65,870		68,870	
	2-2-1	Axle loading with load, front / rear at c_1		kg	98,527	12,343	98,335	15,535
	2-3-1	Axle loading without load, front / rear at c_1		kg	36,877	28,993	36,680	32,190
WHEELS	3-1	Tire type			Pneumatic		Pneumatic	
	3-2	Tire size, front			18.00-25 40PR		18.00-25 40PR	
	3-3	Tire size, rear			18.00-25 40PR		18.00-25 40PR	
	3-5	Number of wheels, front / rear (x = driven wheels)			x4 / 2		x4 / 2	
	3-6	Tread, front	b_{10}	mm	3,703		3,703	
	3-7	Tread, rear	b_{11}	mm	3,060		3,060	
DIMENSIONS	4-1	Boom angle minimum / maximum		degrees	0 / 59		0 / 59	
	4-2	Height of boom lowered	h_1	mm	4,700		4,700	
	4-4-1	Lift height at load center c_1 (2)	$h_{3,1}$	mm	15,150		15,150	
	4-4-2	Lift height at load center c_2 (2)	$h_{3,2}$	mm	13,540		13,540	
	4-4-3	Lift height at load center c_3 (2)	$h_{3,3}$	mm	10,390		10,390	
	4-5	Height, boom extended	h_4	mm	18,110		18,110	
	4-7	Height of overhead guard (cabin)	h_6	mm	3,720		3,720	
	4-8	Seat height to SIP(3)	h_7	mm	2,555		2,555	
	4-15	Height under twistlock - lowered(2)	h_{13}	mm	1,345		1,345	
	4-19	Overall length	l_1	mm	8,660		8,660	
	4-20	Overall length including boom retracted	l_2	mm	11,875		11,875	
	4-21-2	Overall width across all of truck	b_2	mm	4,200		4,200	
	4-21-3	Overall width across spreader 20'	$b_{1,20}$	mm	6,100		6,100	
	4-21-4	Overall width across spreader 40'	$b_{1,40}$	mm	12,200		12,200	
	4-28	Reach distance	l_4	mm	4,310		4,310	
	4-31	Ground clearance, lowest point	m_1	mm	285		285	
	4-32	Ground clearance, center or wheelbase	m_2	mm	437		437	
4-34-3	Aisle width: 20' container, reduced / full stroke (4)	Ast_{20}	mm	12,520	11,950	12,520	11,950	
4-34-4	Aisle width: 40' container, reduced / full stroke (4)	Ast_{40}	mm	14,040	13,830	14,040	13,830	
4-35	Outside turning radius, reduced / full stroke	W_a	mm	8,990	8,450	8,990	8,450	
4-36	Internal turning radius, reduced / full stroke	b_{13}	mm	1,620	1,040	1,620	1,040	
PERFORMANCE	5-1	Travel speed with / without load		km/h	20	23	20	23
	5-2	Lifting speed with / without load		m/s	0.24	0.41	0.24	0.41
	5-3	Lowering speed with / without load		m/s	0.45	0.45	0.45	0.45
	5-4-1	Telescoping speed 20' - 40'		sec	9		9	
5-5	Drawbar pull - 1 mph (1.6 km/h) with / without load		kN	312	320	309	317	
5-7	Gradeability - 1 mph (1.6 km/h) with / without load(5)		%	27	31	27	29	

GENERAL	1-1	Manufacturer			HYSTER-TIL
	1-2	Model designation			RS45-27/31CH
	1-3	Powertrain / drivetrain			Diesel
ENGINE	7-1	Engine manufacturer / model			Cummins / QSL9 227
	7-1a	EPA / CE Tier compliance			Tier 3 / Stage IIIA
	7-2	Engine power output according to ISO 1585		kW	227
	7-2-1	Engine power output - peak		kW	247
	7-3	Rated speed		rpm	2,000
	7-3-1	Engine torque @rpm (1/min)		N-m	1,424 @ 1500
	7-4	Number of cylinders / displacement		# / cm ³	6 / 8900
		Turbocharger			Wastegate, air cooled
	7-8	Alternator output		Amps	120
	7-10	Battery voltage, rated capacity		V / Ah	24 / 160
DRIVE	8-1	Drive control / transmission		Type / #	Hydrodynamic Transmission
	8-2	Transmission manufacturer / type		Type / #	Spicer Off-Highway / TE-27
	8-4	Transmission speeds forward / backward		#	4 / 4
	8-5	Coupling		Type	Torque Converter
	8-6	Wheel drive / drive axle manufacturer / type		Type / #	AxleTech / PRC7545
	8-11	Service brake		Type	Oil immersed (wet) disc
	8-12	Parking brake		Type	Spring applied, dry disc on drive axle
SPREADER	9-1	Spreader manufacturer / type		Type / #	TIL / Elme opt.
	9-3	Size of containers		ft	ISO 20' - 40'
	9-4	Side shift	b ₈	mm	+ 800 / -800
	9-6-2	Rotation angle, with override		degrees	+ 185 / -95
MISC	10-3	Hydraulic tank capacity		l	625
	10-4	Fuel tank capacity		l	830
	10-5	Steering design			Hydrostatic
	10-7	Sound pressure level at driver's seat	Lpaz	dB(A)	78
	10-7-1	Sound power level during the work cycle	Lwaz	dB(A)	109

NOTES:

Specifications are affected by the condition of the vehicle and how it is equipped, as well as the nature and condition of the operating area. Inform your dealer of the nature and condition of the intended operating area when purchasing your Hyster® truck.

- (1) From face of front tires
- (2) With Mechanical Pile Slope (MPS). For optional Powered Pile Slope (PPS) function: deduct 310 mm
- (3) Full suspension seat in depressed position
- (4) Spreader at 8.0 m high, central above front axle; container 0mm in front of tires; includes 2 x 100 mm clearance; full/reduced stroke steer cylinder
- (5) Gradeability figures are provided for comparison of tractive performance, but are not intended to endorse the operation of vehicle on the stated inclines

NOTICE:

Care must be exercised when handling elevated loads. Operators must be trained and must read, understand and follow the instructions contained in the Operating Manual.

All values are nominal values and they are subject to tolerances. For further information, please contact the manufacturer.

Hyster products are subject to change without notice.

Lift trucks illustrated may feature optional equipment. Values may vary with alternative configurations.

> RATED CAPACITIES AND STACKING HEIGHTS – CONTAINER HANDLERS

<p>RS 45-27 CH CONTAINER SPREADER</p>	<p>RS 45-31 CH CONTAINER SPREADER</p>
<p>4-5 (h₄)</p> <p>1-6-3 (c₃) 1-6-2 (c₂) 1-6-1 (c₁) 1-6-3 (c₃) 1-6-2 (c₂) 1-6-1 (c₁)</p> <p>9' 6" containers 8' 6" containers</p>	<p>4-5 (h₄)</p> <p>1-6-3 (c₃) 1-6-2 (c₂) 1-6-1 (c₁) 1-6-3 (c₃) 1-6-2 (c₂) 1-6-1 (c₁)</p> <p>9' 6" containers 8' 6" containers</p>



PERFORMANCE	STD	OPT
Cummins QSL 9 turbo diesel engine delivering 227 kW (rated) / 247 kW (max)	X	
Tier 3 / Stage IIIA compliant	X	
Wastegate turbocharger	X	
Hibernate Idle	X	
Hydraulically driven on-demand cooling fan	X	
120 amp alternator	X	
Powertrain protection system	X	
Spicer Off-Highway TE-27 4-speed auto-shifting transmission	X	
Axletech PRC 7545 drive axle with wet disc brakes	X	
LIFT	STD	OPT
On-demand load sensing hydraulic system	X	
Automatic throttle-up when lifting (in neutral or inching)	X	
2-stage boom for 5-high 1st row stacking	X	
3BG load moment indicator (integrated in digital operator display)	X	
High speed hoist system - when empty	X	
High speed hoist system - below 10 tons		X
Hydraulic system temperature protection		X
Container weighing system SOLAS compliant		X
HANDLING	STD	OPT
CANBus spreader TIL & ELME model 817 with rotation (opt.)	X	
Mechanical Pile Slope	X	
4 lifting eyes located on end beam corners	X	
4 lifting eyes located under center beam of spreader		X
Container guides - located outside near twistlocks		X
Container guides - 500mm inset, heavy duty		X
VISIBILITY	STD	OPT
External wide angle mirrors mounted on rear of front fenders	X	
External wide angle mirrors mounted on top of front fenders	X	
Rear view camera system		X
Halogen work lights	X	
LED work lights		X
High performance LED work lights		X
LED twistlock indicator lights		X
LED stop/tail/brake lights		X
APPEARANCE	STD	OPT
Hyster yellow paint base truck	X	
Special paint base truck		X

ERGONOMICS	STD	OPT
Powered sliding cabin (1200 mm), including additional mirrors on top of fenders	X	
Isolated mounting for low noise and vibration	X	
Coat hook	X	
Cabin emergency exit - rear hinged window	X	
Front, top and rear wipers	X	
Front and rear window defrosters	X	
Left side handrails, stairway and cabin door	X	
Right side handrails, stairway and cabin door		X
Stair lights		X
7" digital operator display	X	
Seat-side joystick hydraulic control	X	
Steering wheel spinner knob	X	
Directional control lever	X	
Interior wide angle mirrors	X	
Heater with 3-speed fan	X	
Telescoping & tilting steering column	X	
Recirculation fan	X	
DC/DC converter 24 volt/12 volt with socket*		X
Air conditioning		X
Sun shades on top and rear		X
Radio preparation set-up (wiring, two speakers and antenna)		X
Reading light		X
Operator presence system		X
Mechanical suspension seat		X
Cloth seat cover	X	
2-point high visibility seatbelt	X	
3-point high visibility seatbelt		X
OPERATION	STD	OPT
Electric air horn 112 dB	X	
Visible alarm - amber strobe light, key switch activated*		X
Visible alarm - amber strobe light, switch and key switch activated*		X
Audible alarm - reverse direction activated 82-102 dB(A), self-adjusting	X	
Forward motion alarm		X
Seatbelt interlock for engine start		X
Seatbelt indicator light on top of cab		X
Tire pressure monitoring system		X
Lockable battery disconnect switch	X	
Adjustable automatic "empty seat" engine shutdown		X
Trainer seat		X
Non-locking fuel cap	X	
Lockable fuel cap		X
Hyster Tracker wireless asset management - monitoring*		X
Hyster Tracker wireless asset management - access / verification		X
24 volt electrical system	X	
Steer wheel lug nut protection	X	
Engine compartment light		X
SUPPLEMENTAL	STD	OPT
Literature package	X	
Operator's manual	X	

STRONG PARTNERS. TOUGH TRUCKS™

FOR DEMANDING OPERATIONS, EVERYWHERE.

TIL as an organization stands for Technology, Innovation and Leadership. Partnering India's infrastructure build since 1944, TIL is one of the leading providers of a wide range of infrastructure equipment that represent some of the finest in global technology. TIL is engaged in the design, manufacture and marketing of a comprehensive range of material handling, lifting, port equipment and road building solutions, duly supported by an integrated after-sales support. Recognized as a market leader in mobile cranes and reach stackers, TIL's products are synonymous with reliability, productivity and efficiency.

Cutting Edge Technology

TIL's state-of-the-art manufacturing facilities located in Kamarhatty and Kharagpur, West Bengal, include fully equipped machine shop, fabrications and assembly shop, finishing bays and test bed. The research & development center has the latest CAD / CAM facilities and engineering software. The modern structural fabrication shop is equipped with automatic machines and the processes conform to ISO 3834, AWS D14.3 & others. At TIL, quality is engineered to predetermined process parameters. TIL is committed to setting higher & higher benchmarks in product quality. This commitment is reflected in the ISO 9001 Certification from Bureau Veritas Quality International.

24X7 Service. Anytime, Anywhere.

TIL's integrated customer support – is aimed at reducing equipment downtime and the overall cost of operations. TIL provides superior customer service through its countrywide customer support network. With a cutting edge technology and unique, integrated customer support services, TIL has consistently led the manufacturing market and helped in changing the landscape of the material handling business in India. At TIL our expert team of service professionals takes particular care to meet your customized needs and ensure that your fleet of Hyster lift trucks and other material handling equipment remains reliable, safe and efficient 24 X 7.

Our customer support offerings include:

- Pre-Purchase Consultancy & Equipment Investment Analysis
- Quick Parts Availability
- Preventive Maintenance Through Annual Service Contracts
- Prompt On-Site Service
- Complete Equipment Rebuild
- Pan India Network
- Qualified Engineers on Call
- Specialized training for operating Hyster Forklifts, Container Handlers and Reach Stackers



TIL Limited

CIN: L74999WB1974PLC041725

Registered & Corporate Office:

1, Taratolla Road, Garden Reach, Kolkata - 700024
 Phone: + 91 33 2469 3732-6, 6497 | 6633 2000, 2845
 Fax: + 91 33 2469 2143, 3731
 Email: mhg_er@tilindia.com, mktg-til@tilindia.com



CHENNAI

TIL Limited
 Jhaver Plaza, 7th Floor 1-A,
 Nungambakkam High Road,
 Chennai 600 034, Tamil Nadu
 Phone: +91 044 6670 3000 / 3010
 Fax: +91 44 2827 9681
 Email: chennai.til@tilindia.com

DELHI NCR

Plot 11, Site No.IV,
 Sahibabad Industrial Area
 Ghaziabad 201 010 U.P.
 Phone: +91 120 277 8735 / 8736 / 7468
 Fax: +91 120 277 7467
 Email: MHG Marketing.Sahibabad@tilindia.com,
 mhgcs.sahibabad@tilindia.com

DELHI

TIL Limited
 302 Ansal Bhawan,
 16, Kasturba Gandhi Marg, New Delhi 110 001
 Phone: +91 11 2331 1607 / 8046 / 9248 /
 2335 0250 / 0255
 Fax: +91 11 2331 3263,
 Email: til.delhi@tilindia.com

KAMARHATTY

TIL Limited
 517, Barrackpore Trunk Road,
 Kolkata 700 058
 Phone: +91 33 2553 1352 / 1882 | 6633 4000
 Fax: +91 33 2553 2546, 5971
 Email: MKT Dept.KMT@tilindia.com, tilkmt@tilindia.com

KHARAGPUR

TIL Limited
 Vill. & P.O. Changual, Kharagpur
 Dist: Paschim Medinipur 721 301,
 West Bengal
 Phone: +91 32 2266 1101

MUMBAI

TIL Limited
 502 - A, 5th Floor, Western Edge Tower No.1 Western Express Highway, Datta Pada Road
 Borivali (East), Mumbai 400 066, Maharashtra
 Tel: 91-022-6147 9159 / 9135 / 9143 / 9133 / 9137
 Mobile: +91 90043 88002, 99301 11962, 98926 79925
 Fax: 91 22 6147 9111
 Email: Mumbai.TIL@tilindia.com, mumbai.custsupp@tilindia.com

Toll Free No: **1800 266 1535**
 Email: **mktg-til@tilindia.com**
www.til-hyster.in
www.tilindia.in